
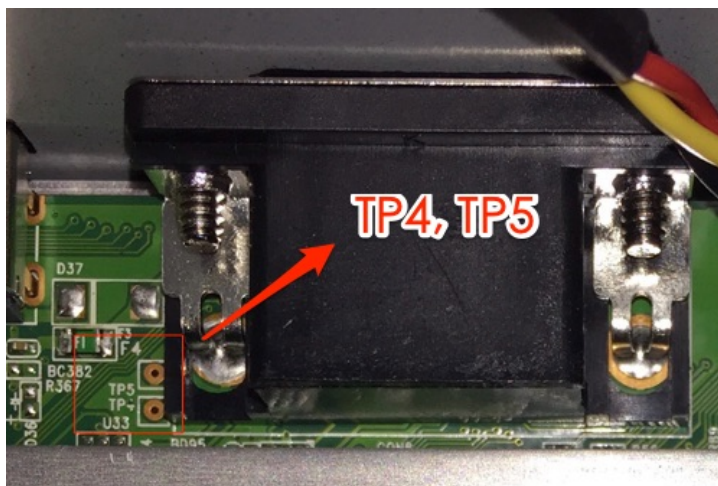


STEP1: Remove the DVR cover and find the chip resistor to reset the hardware

STEP2: The chip resistor is located on TP4 and TP5, as indicated below:

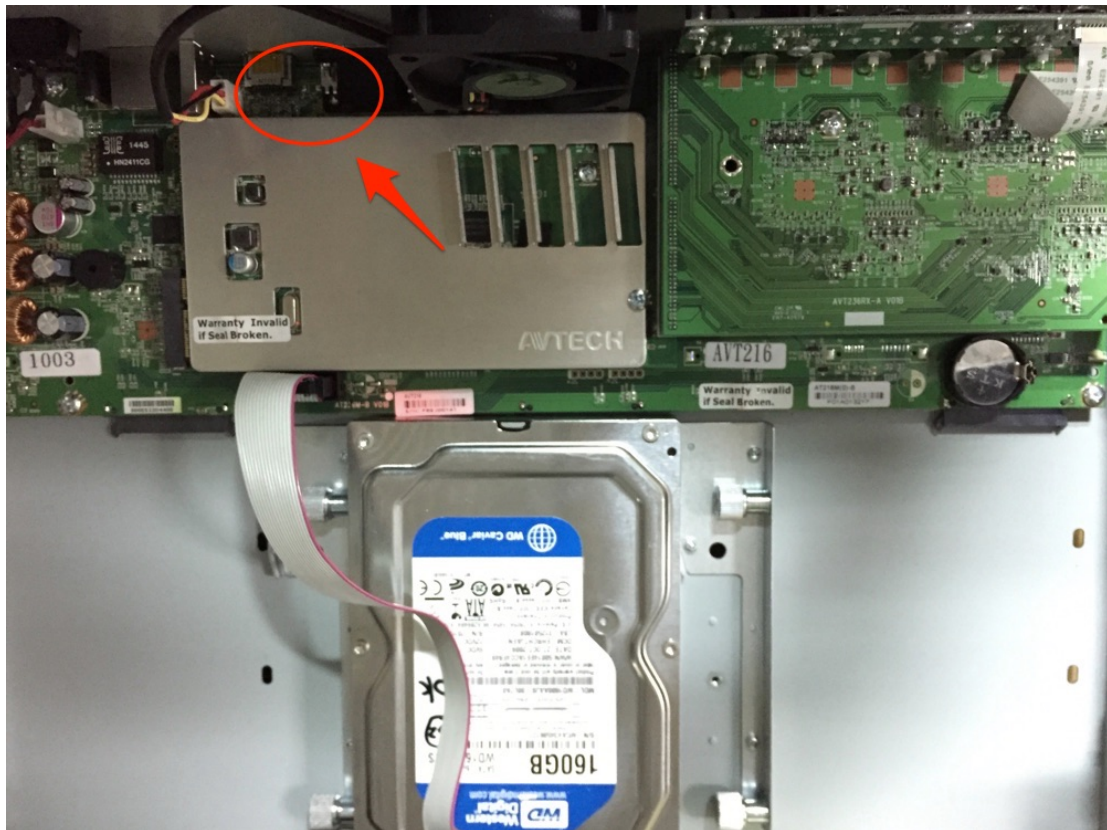

STEP3: Disconnect the DVR power. Then, make the chip resistor short-circuited with a conductive object (such as forceps), and re-connect the power. Remove the conductive object when you hear a short beep sound, and wait till the DVR reboots.